

Product Features

P1dB's P1AD-29MM is a straight 2.92mm Male to 2.92mm Male adapter that operates to 40 GHz with a maximum VSWR of 1.25:1. Material is passivated stainless steel.

P1dB offers a large selection of standard and precision RF adapters in both 50 Ohm and 75 Ohm designs for lab, aerospace industrial and commercial applications.




Electrical Specification: $T_{\text{Ambient}} = 25^{\circ} \text{C}$

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Impedance				50.0		

Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	2.92mm Male	
Connector 2	2.92mm Male	
Orientation	Straight	
Mount Type	None	
RoHS Compliance	Yes	

Drawing

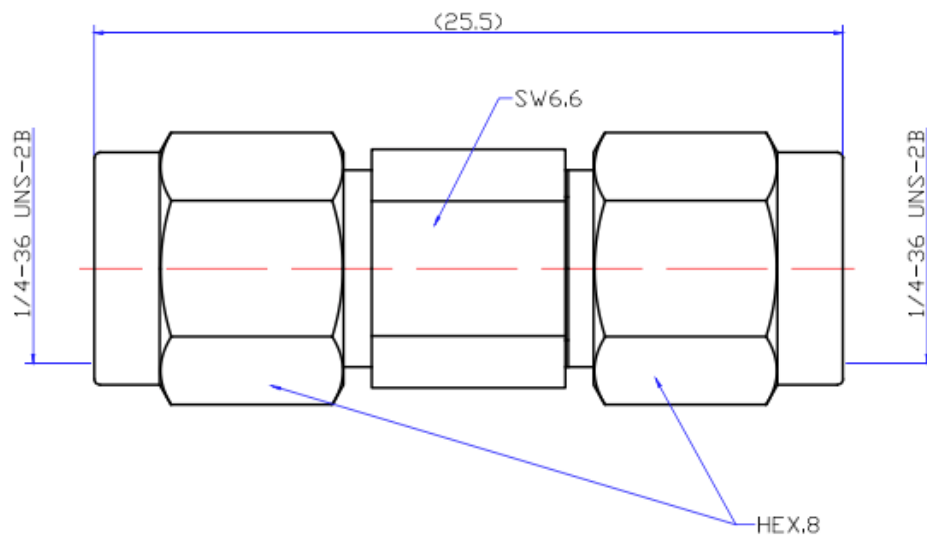

Product Notes

-55 to +85 deg C operating temp range.