

Product Features

P1CO-SAF4-F015-27G is a 50 Ohm RF connector, SMA field replaceable, 4 hole flange mount that mates with a .015 inch pin.

Operating to 27 GHz with a maximum VSWR of 1.20, the P1CO-SAF4-F015-27G features a passivated stainless steel body and includes an EMI gasket to reduce RF leakage.




Electrical Specification: T_{Ambient} = 25° C


Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		27.0	
Impedance				50.0		

Mechanical And Environmental Specifications:

Parameter	Description	Notes
RoHS Compliance	Yes	

Drawing

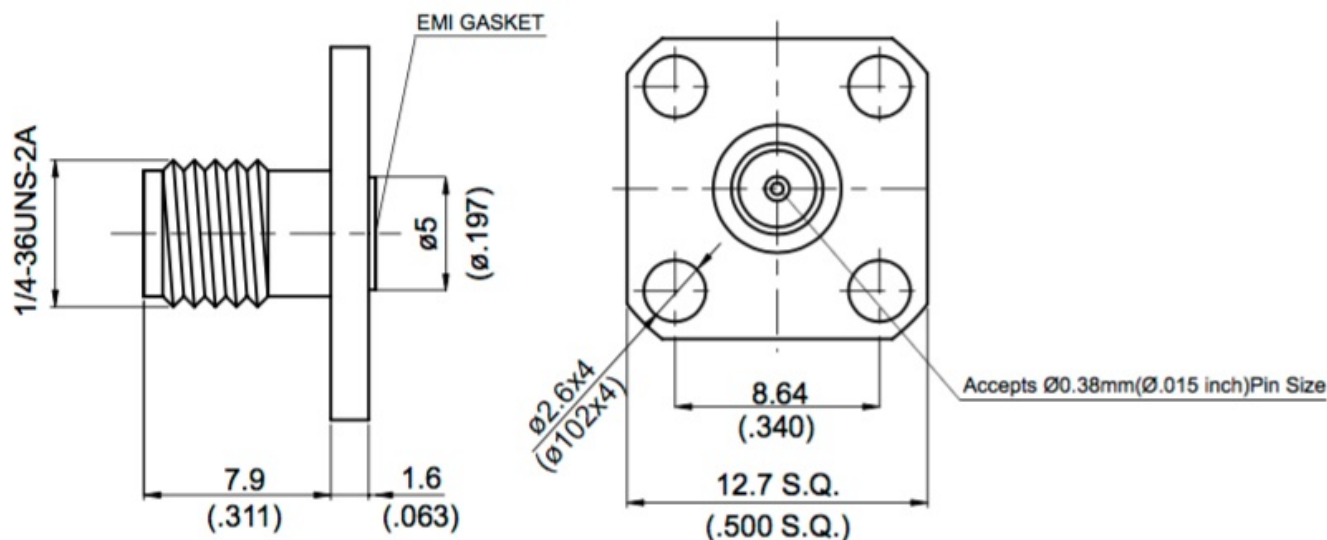



Graph

Parts	Material	Plating (Micro-inch)
EMI Gasket	Conductive Silicon Elastomers	
Contact Pin	Beryllium Copper	Gold 20 Over Nickel 50 Over Copper 50
Insulator	Teflon	
Body	Stainless	Passivated

Product Notes